



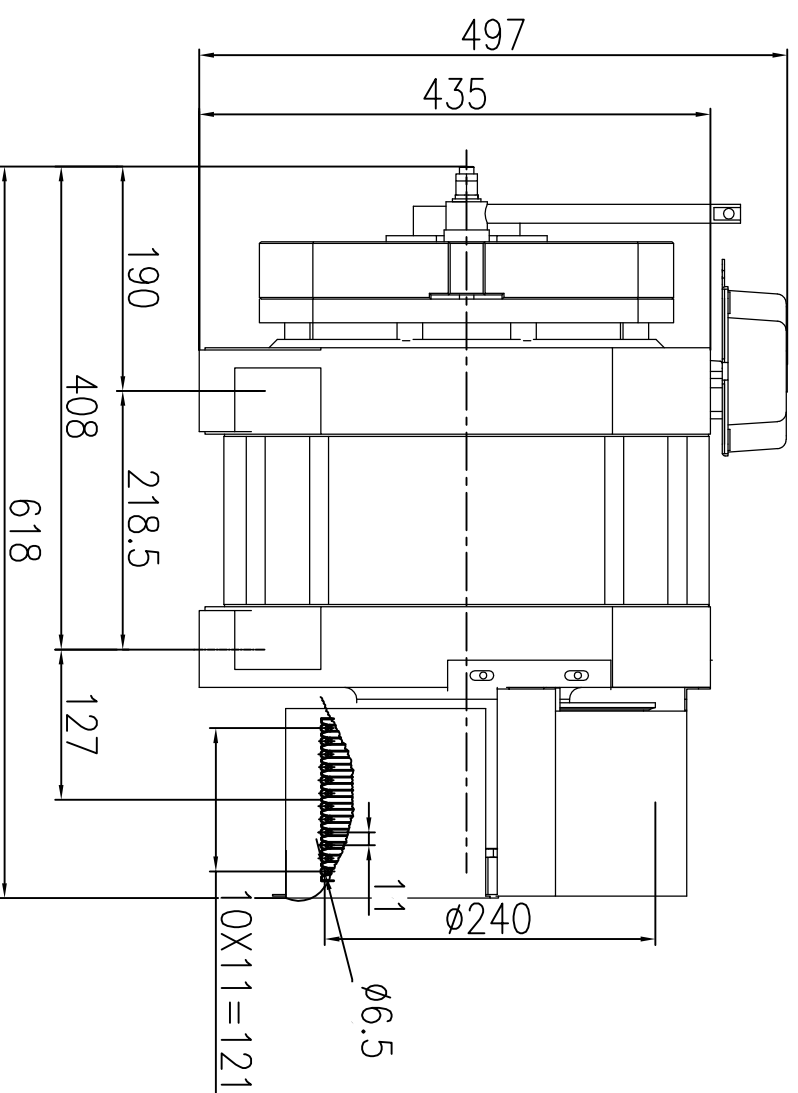

WARNING: CEO Motor (SUZHOU) Co., LTD., to file and contains data ownership, can only be used in the scope of the company for the purpose; Without prior written authorization, shall not copy or disclose all and part information, And must be returned in time related information and copy to suzhou west agree motor co., LTD.

Basic dimensions L/D	Unmarked tolerance TOL
0.5-6	±0.1
>6-30	±0.2
>30-120	±0.3
>120-400	±0.5
>400-1000	±0.8
>1000-2000	±1.2
>2000-4000	±2
Round/ Chamfering R/C	Unmarked tolerance TOL
0.5-3	±0.2
>3-6	±0.5
>6	±1.0
Short side Length LSS	Unmarked tolerance TOL
>0-10	±1
>10-50	±0.5
>50-120	±0.3
>120-400	±0.5
>400	±0.1

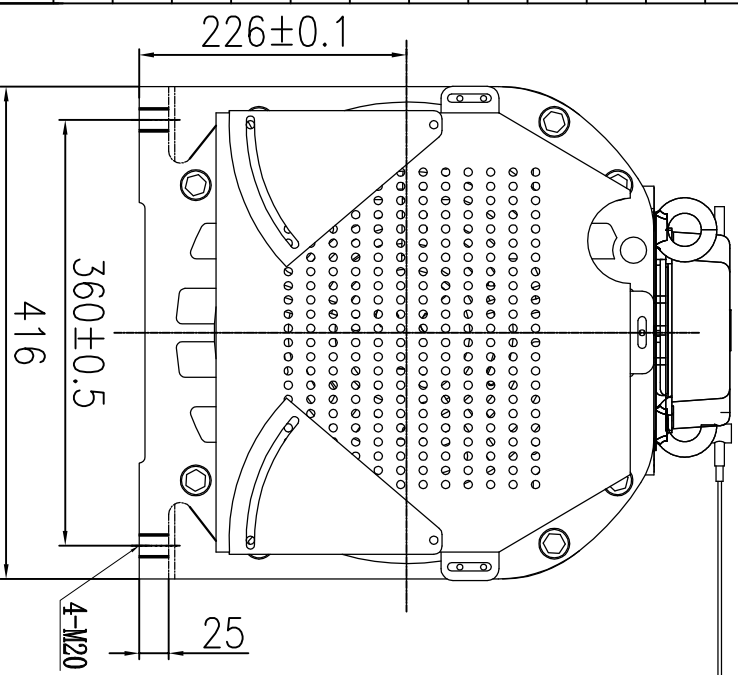

Technical requirement:

1. The surface of the rope groove needs to be hardened, and the hardness is not less than HRC50. For the hardened rope groove, the hardness difference should not be greater than HRC8
2. Heidenhain 1313 encoder。

									Part Name	Drawing No
									OUTLINE DRAWING	3TTC.000.32
								Model	Material	Scale
								CSAC-KZ40 (160kg)		
								Total pages	Page	Weight
A0					CHK	LH	TEC	CQX		
					DSG	LHG	APPD	LD		
Version No.	Mark	NO.		Change the Content	Person in charge	Date	FIRST DRAWING DATE	2023-03-07	CEG Motor (SUZHOU) Co., LTD	